


Dakota Audio

FA Series Control Panel





Input:
The balanced input is transformer isolated, line level. It is compatible with any standard line level input. Balanced or Unbalanced. Do not connect it to a speaker level audio source. The 1/8" (3.5mm) mini-jack will accept stereo inputs such as a computer or headset output.


Power and Ground:
The array requires either 16 to 18 VAC or 24VDC, 0.3 AMPS. Connect the power to the two power terminals. The terminals are not polarity sensitive. The ground terminal may not be needed, see the section on input connections.

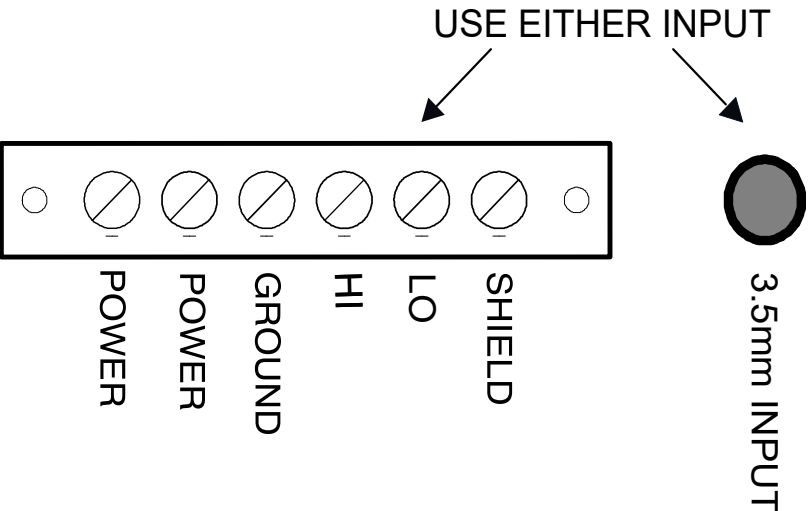

Mounting Height and Width Buttons:
Press the buttons to adjust the mounting height and width of coverage area.

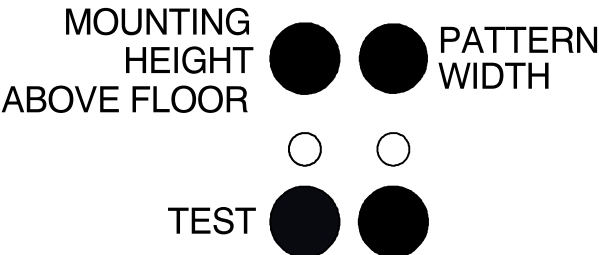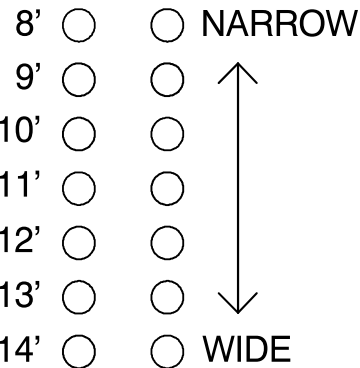

Volume:
Set the volume at just above conversation level. In the preset position, the volume control is not active. Use this when the volume is set at the signal source.

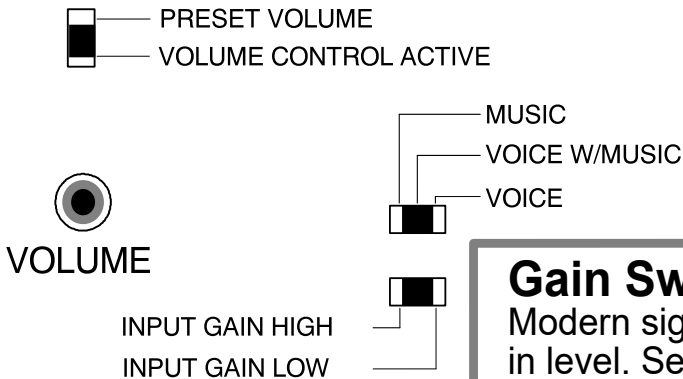

Music/Voice Switch:
Music: Full Range
Voice with Music: Reduced Base, Increased High Frequencies
Voice: Further Reduced Base, More High Frequency Boost
Note: In reverberate areas or where greater sound control is desired, put the switch in the “voice” position.

Gain Switch:
Modern signal sources can vary considerably in level. Set the switch in the position that gives the proper output level.